

- Instructions: 1. **Please attach sail measurement forms and cruising credit declarations to this form**
2. Application will not be processed without owner and measurer signatures
3. Class rules regarding sails and penalties can be found at www.phrf-le.org
4. Note any modifications from original boat.
5. Attach any previous certificates or class measurement forms if available
6. Mail or e-mail completed form with fees to the PHRF office, normal process time is 3 weeks
7. New designs to PHRF-LE database require committee hearing resulting in a delay of certificate issuance
8. Payment is by paper check, Venmo @PHRF-LE (Friends and Family), and Credit Card <https://square.link/u/hTfe3Ggy>



PHRF-LE INC.
P. O. Box 770109
Cleveland, OH 44107
VOICE; 440-933-9917
EMAIL: phrfle@gmail.com
www.phrf-le.org
ANNUAL MEMBERSHIP \$40 (US)

Owner Name	
Address	
City, State, Zip	
Yacht Club or USSA #	Email Address
Home Phone	Alt Phone Cell Phone
Use Design Measurements:	BOAT INFORMATION
LOA	Boat Name
LWL	Sail #
Beam	Class (i.e. Tart 30)
Draft	Hull Ident. # i.e. BCCMM4149M84H stamped on stern;
Displacement	Year Mfg.
Ballast (lbs / kg)	Designer
Ballast Material	Are there lifelines? Yes ☐ No ☐
	Is there a bow pulpit? Yes ☐ No ☐

Where was the boat last raced or where did you purchase it? Boat Owner's name if known.

Engine	Inboard ☐ Outboard ☐ Sail Drive ☐ Retractable OB w/Plug ☐
Propeller	In Aperture ☐ Exp Strut ☐ Strut Drive ☐ Sail Drive ☐
Rig	Masthead ☐ Fractional ☐ Other ☐
Rudder	Attached ☐ Skeg ☐ Spade ☐ Outboard ☐
Prop Type	Folding ☐ Feathering ☐ Fixed 2 Blade ☐ Fixed 3 Blade ☐ Other ☐
Keel	Fin ☐ Full ☐ Centerboard ☐ Wing ☐ Shoal ☐

RIG-Use measured data:	
I	Jib - hoist to deck (vertical)
P	Main - hoist to gooseneck (vertical) to band on mast
E	Main - foot - gooseneck (horizontal) to band at max point
J	Jib - Mast to stem fitting (horizontal)
TPS	Sprit Length
SPL	Pole length -center of mast fitting to center of outboard pole fitting
ISP	Exit point for spinnaker halyard

Sail - Genoa	Age of Sails
L _p or largest headsail	Shortest distance clew to Luff (Perpendicular)

Sail - Main	Age of Sails
P	Max length from pin to pin on luff or sail
E	Main - foot - max length from pin to pin on foot

Sail - Spinnaker	Include measurements of ALL Spinnakers; be sure to note age of the sail
SL	Luff Length
SF	Foot Length
SMG	Width at widest point (.5 SMG depicted)
SLE	Leach length from clew to head (for asymmetrical spinnakers)
SLU	Luff length from tack to head (for asymmetrical spinnakers)

Measurer: _____ Date: _____
 Owner: _____ Date: _____

The applicant acknowledges that all PHRF-LE activities are undertaken by volunteers using their own time and funds for the benefit of the company and its members, and in consideration of their efforts and the examination of my PHRF-LE application, does hereby waive, release and cancel any and all claims I may have against PHRF-LE, its officers, trustees, directors and committee members, measurers, agents and representatives arising out of the functions and activities of PHRF-LE and the actions of persons fulfilling the offices named above, and does further covenant agree not to sue or bring any claim of any nature whatsoever against PHRF-LE and all persons acting on its behalf.

Office - Copy 1 - Handicapper - Copy 2 - Owner - Copy 3



CRUISING CREDITS

CRUISING CREDIT APPLICATION MUST ACCOMPANY THIS FORM

Measurement from sailmaker MUST ACCOMPANY THIS FORM

ROLLER FURLING CREDIT

- ☐ CLASS 1 +3 - Two sails; one must be 110% or less; Mylar, pentex, polyester, Dacron, kevlar
- ☐ CLASS 2 +6 -One headsail; woven Dacron or woven polyester; 4.5 oz. UV cover
- ☐ 2 BLADE FIXED PROP CREDIT+6 In aperture props (i.e. Tartan 27) and sail drives do not qualify
- ☐ 3 BLADE FIXED PROP CREDIT+12 In aperture props (i.e. Tartan 27) and sail drives do not qualify
- ☐ ROLLER FURLING MAIN AT MAST +6



NOTES

Note there are both minimum and maximum mid-girth restrictions along with luff length limitations on spinnakers. Consult the class rules for additional details.

Mainsails need further measurements including HB, MGT, MGU, MGM, MGL

Modifications

HB	1"=0.08'
MGT	2"=0.167
MGU	3"=0.25'
MGM	4"= 0.33'
MGL	5"= 0.42'
	6"=0.50'
	7"= 0.58'
	8"= 0.67'
	9"= 0.75'
	10"=0.83'
	11"= 0.92'
	12"=1.00'

MAINSAIL

Age of Sail _____

HB > of 0.5 or 0.04E

HB= _____

Leech 7/8 Point MGT= _____

0.22E_{max}=

Leech 3/4 Point MGU= _____

0.38E_{max}=

MEASURE
FROM
LEECH

TO NEAREST
POINT
ON LUFF

Leech 1/2 Point MGM= _____

0.65E_{max}=

P= _____

P_{max}=

Leech 1/4 Point MGL= _____


0.90E_{max}=

CLEW

E= _____


E_{max}=

TACK

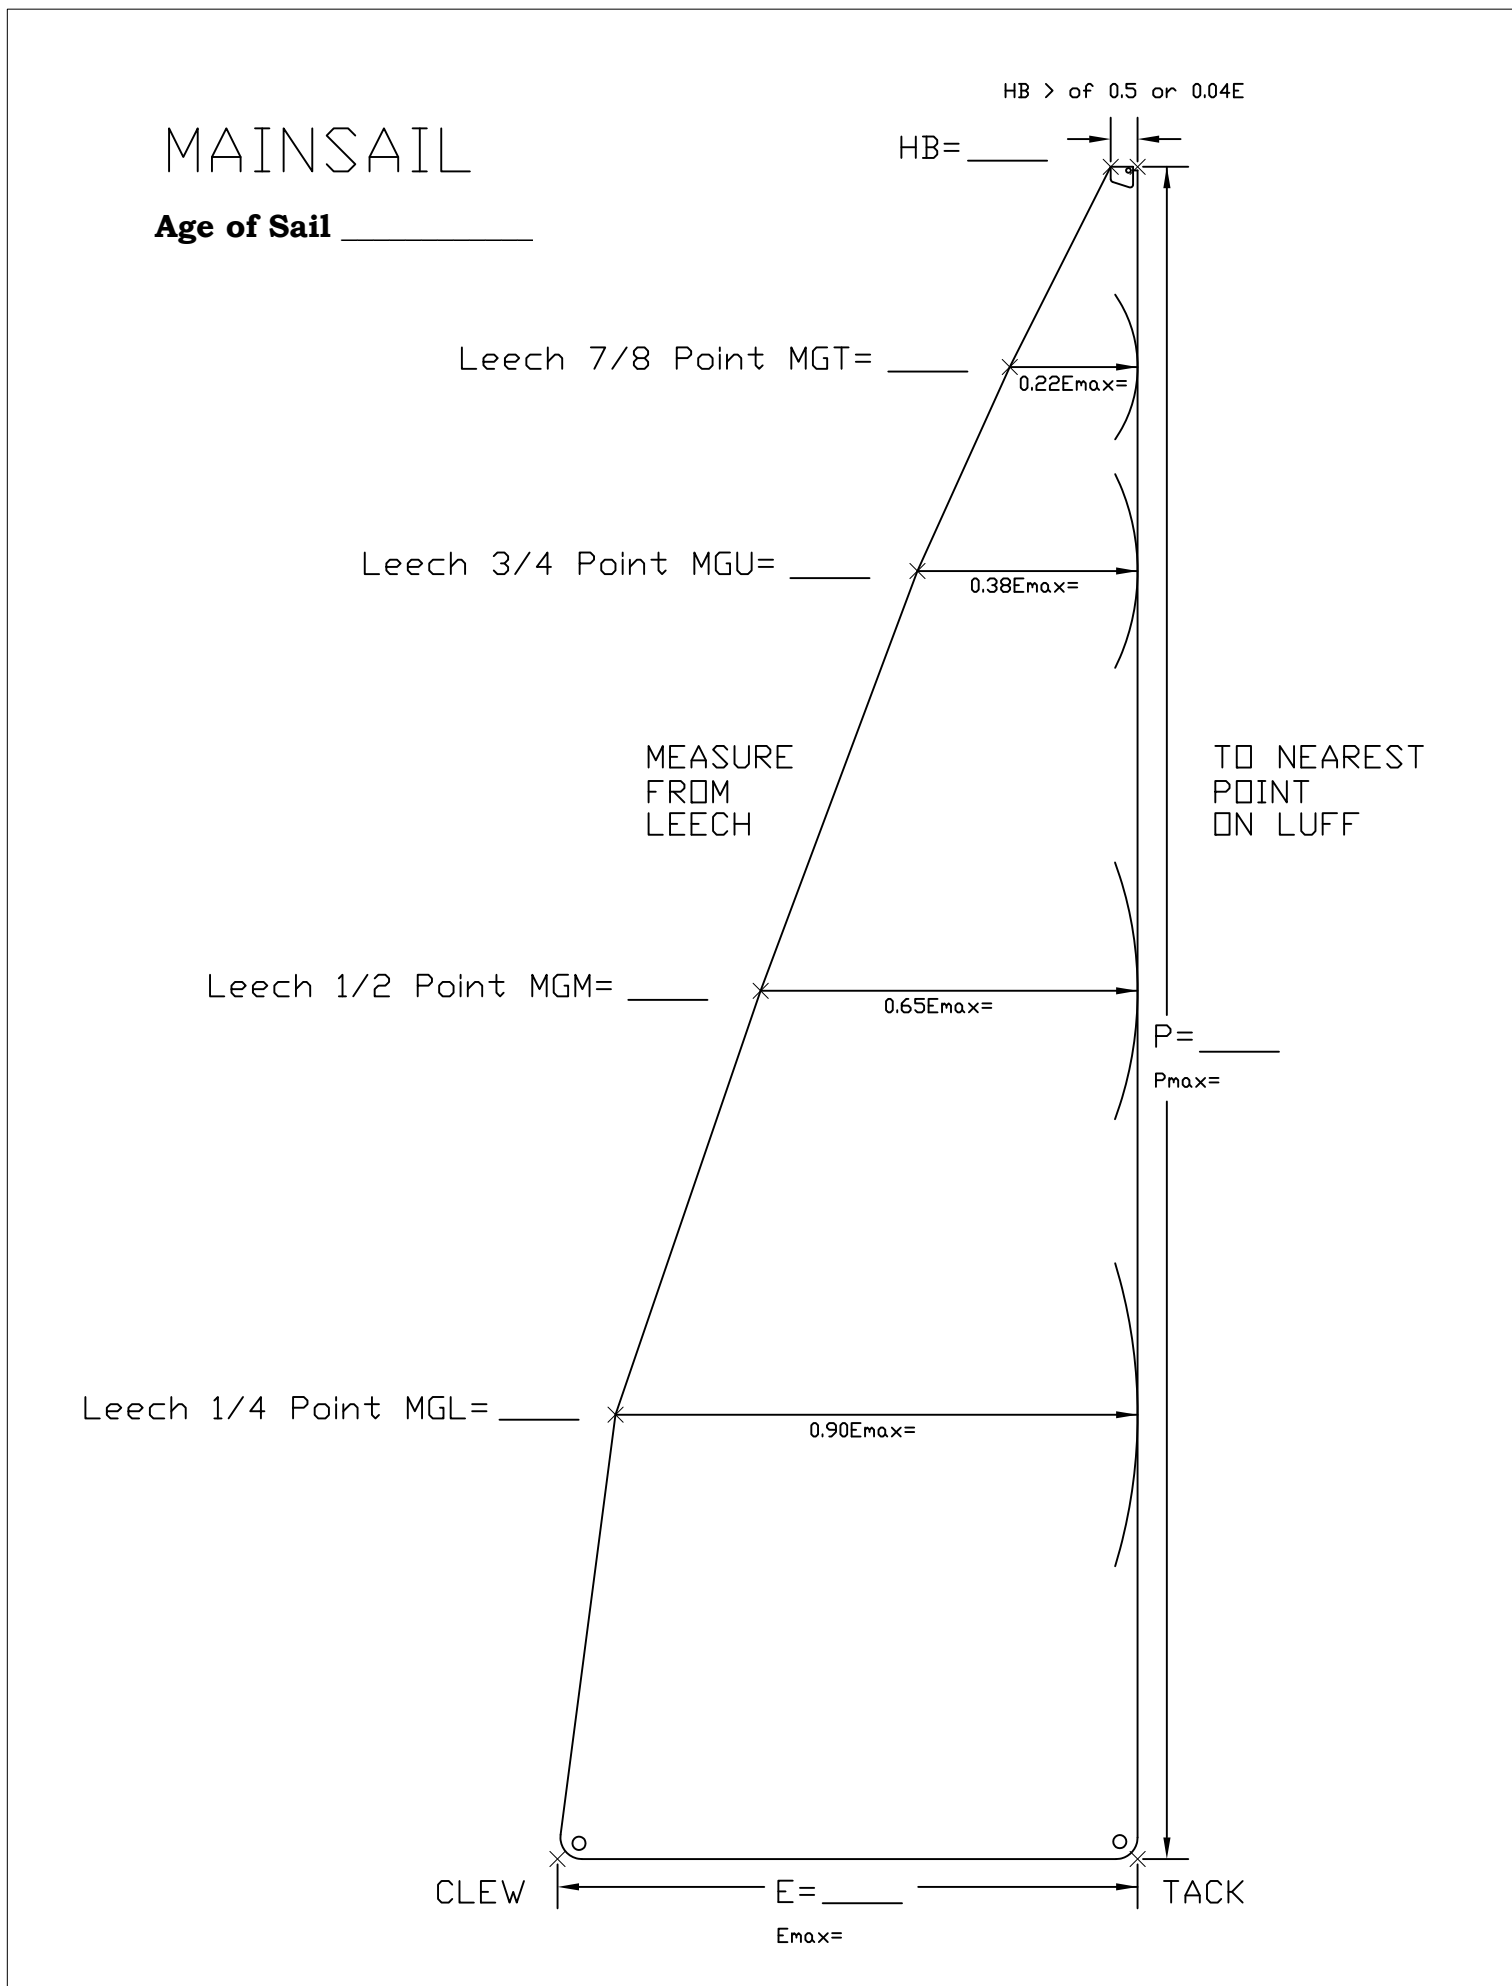

HEADSAIL



Age of Sail _____

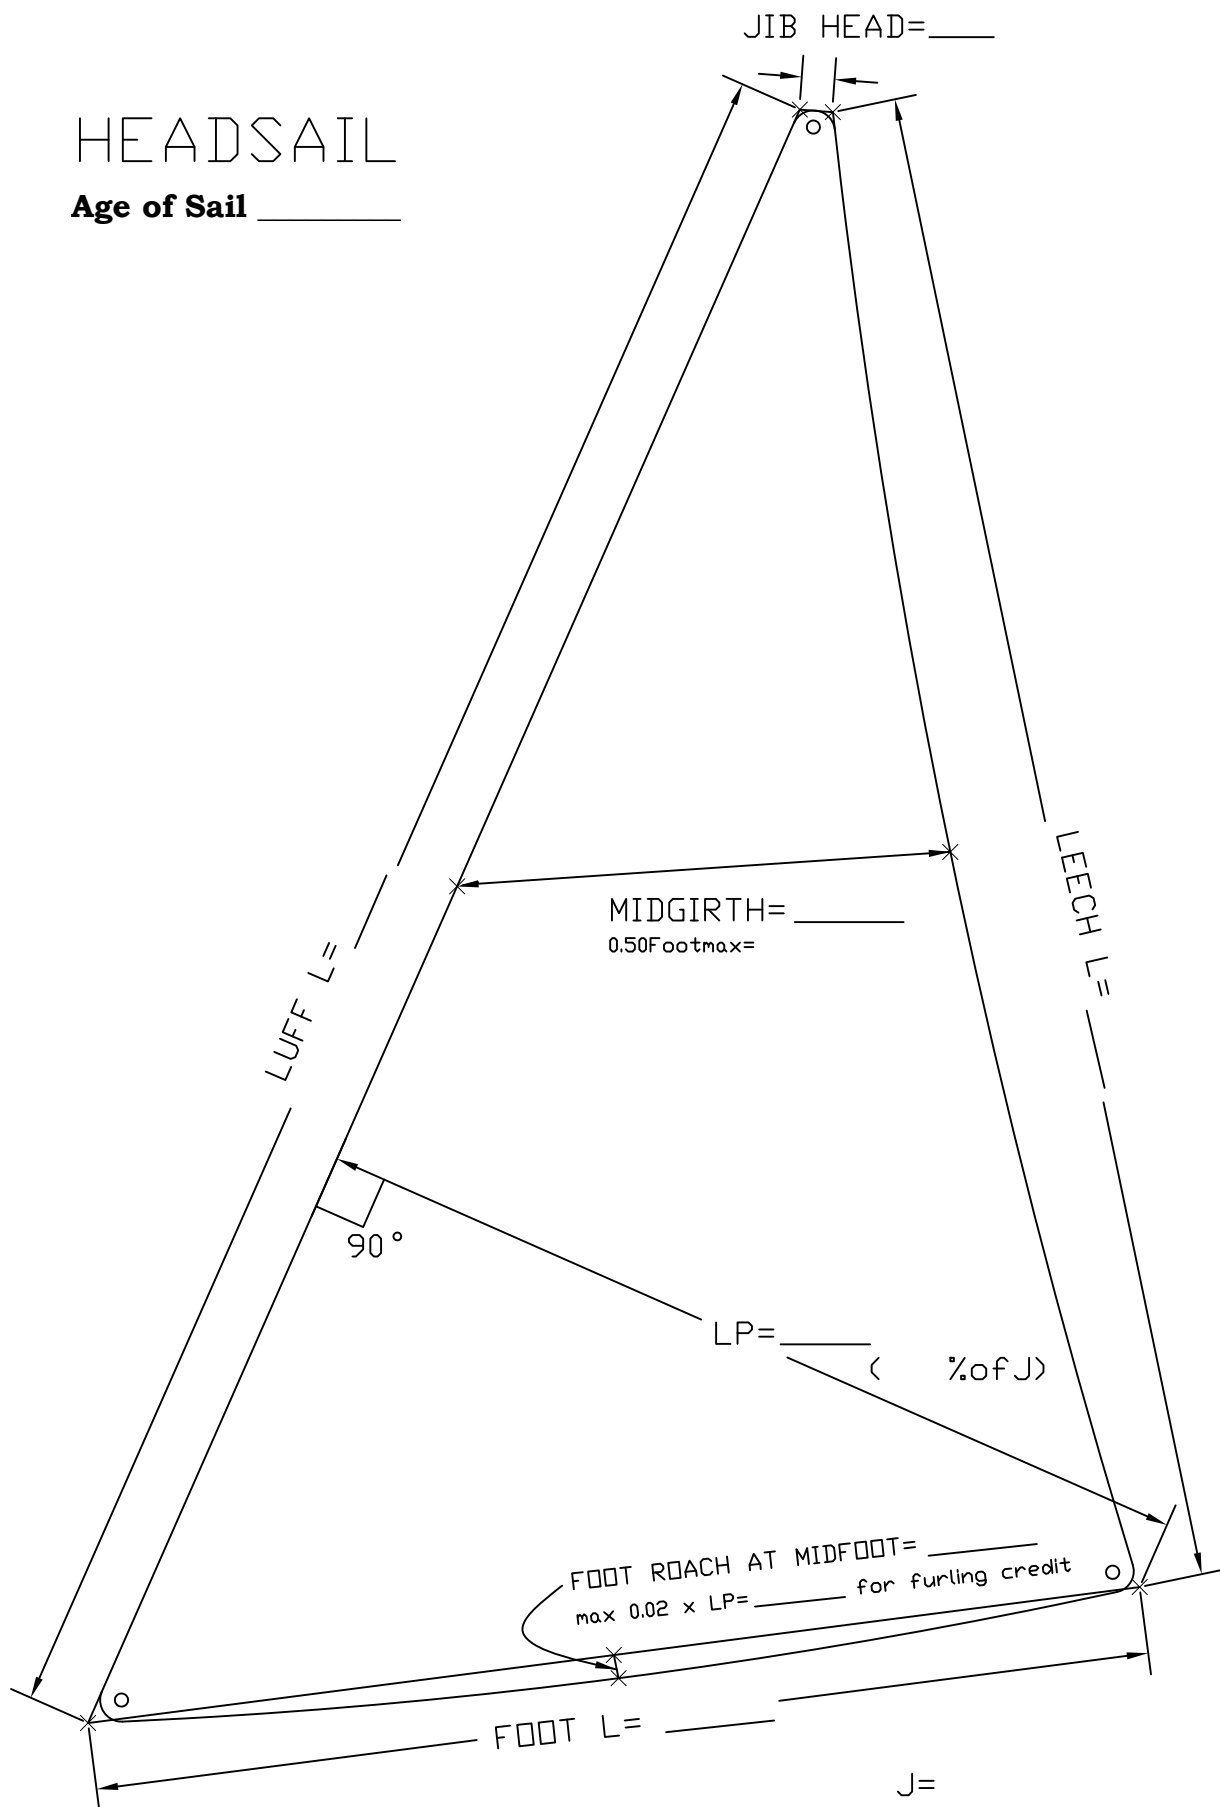

SPINNAKER

HBS= _____

Age of Sail _____

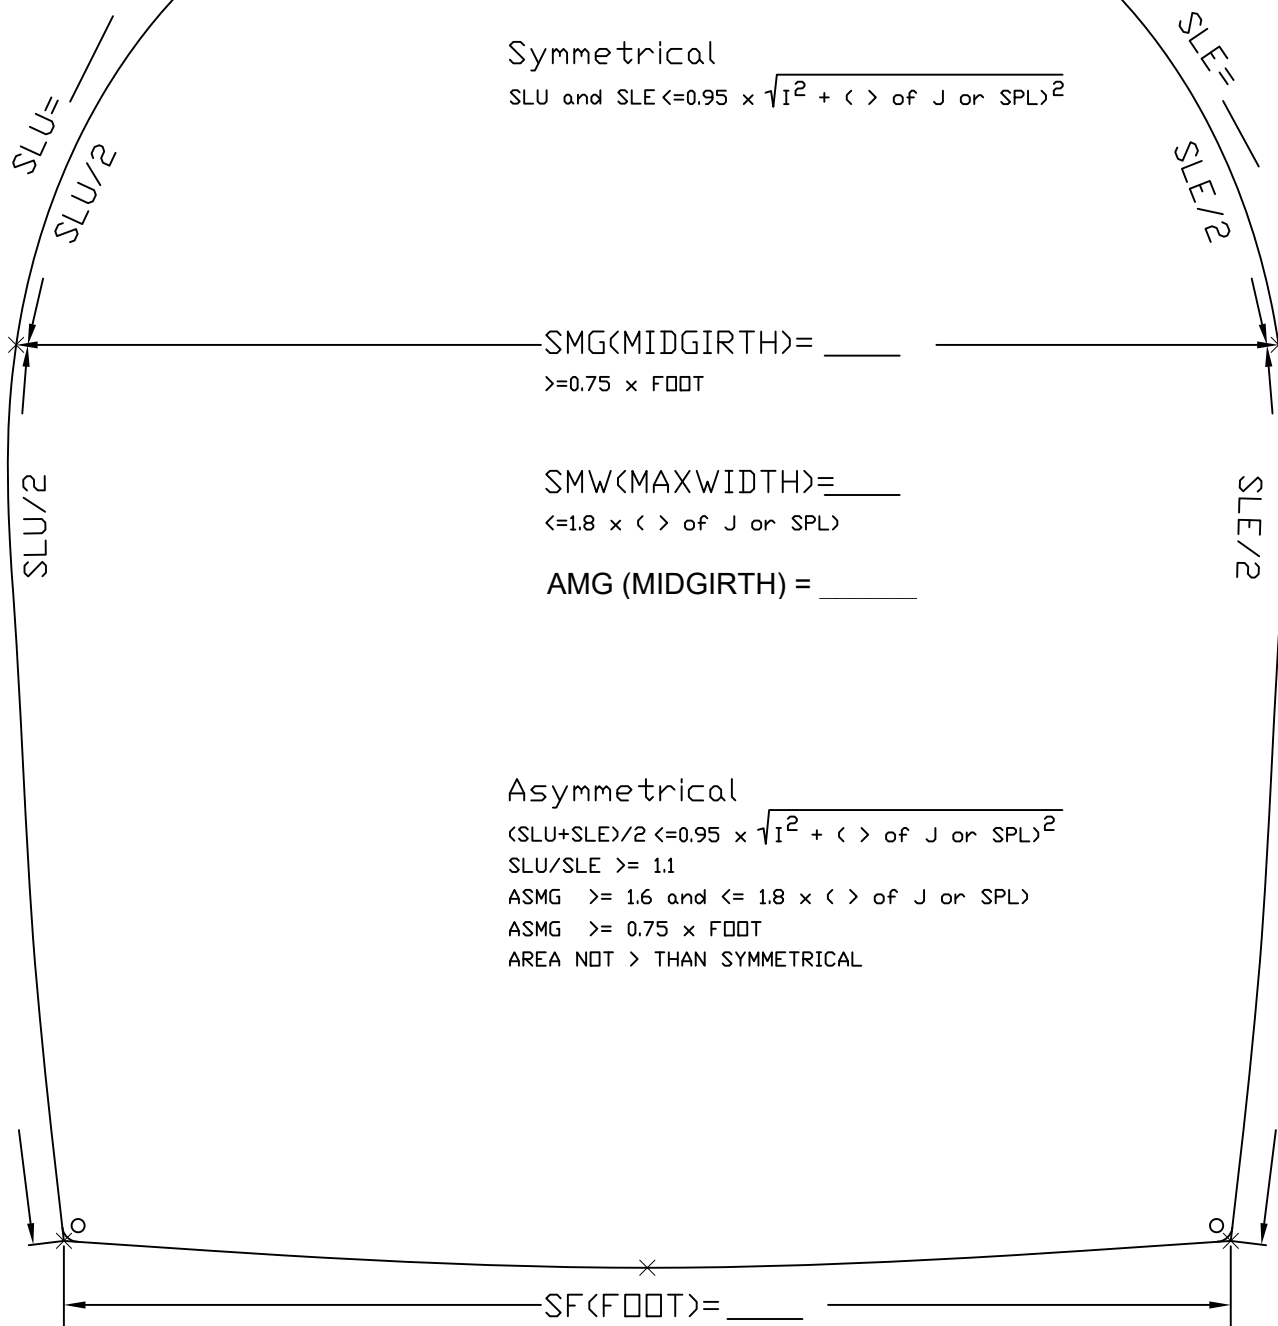

$x + y = \text{SPL} \leq \text{J without penalty}$

J=

I=



PHRF-LE INC.
P.O. BOX 770109
CLEVELAND, OHIO 44107
VOICE: 440/933-9917
FAX: 440/933-0090
EMAIL: info@phrf-le.org

CRUISING CREDIT APPLICATION

I have checked below the cruising credits I wish to take for the current sailing season. A sail measurement form must accompany this application if applying for roller furling credits. I understand that only ONE change will be permitted during the season and that it will take 4-8 weeks from receipt by the PHRF-LE secretary for the new certificate to be issued. There will be NO EXCEPTIONS.

☐ **RF Credit- Class 2 +6 sec/mi** - Limited to one headsail* constructed of woven Dacron or other polyester fibers with a minimum 4oz fabric UV cover on the leech and foot of the sail. The foot roach requirement of 2% of LP was removed effective 1/1/2025.

☐ **RF Credit- Class 1 +3 sec/mi** - Boat is limited to using 2 headsails*; the 2nd sail must be 110% or less that have been qualified for the current year. No limitations on sail materials.
For example, if you have roller furling sails registered from a previous year and replaced it with a new sail, the old sail can no longer be used for racing. In addition, if you previously registered a 135% sail as your largest headsail and purchased a new 155% sail, you cannot use the 135% sail for racing as it is not < 110%. If your sail inventory has a 135%, an old 155%, and a new 155% that was registered for the roller furling credit, you cannot use the 135% or the old 155% if the air is up in order to 'save' the new one from breaking down. The foot roach requirement of 2% of LP was removed effective 1/1/2025.

*Not including storm jibs as defined in ISAF Offshore Special Regulations 4.26.

☐ **Roller Furling Main at Mast +6 sec/mi**

☐ **2 Blade Solid Propeller +6 sec/mi**

☐ **3 Blade Solid Propeller +12 sec/mi**

Please complete the following information. Do not leave any blanks as this will hold up your certificate.

Boat Name _____ Sail # _____ Date Sail was Made _____

Owner Name _____ Sailmaker _____
Please Print Please Print

LP Measurement of Largest Headsail _____ LP measure of 2nd sail (must be <110% _____
LP% of Largest Headsail _____ LP% of 2nd sail (must be <110%) _____

Are you using one sail Yes _____ No _____

Material Composition of Largest Headsail _____ Laminate or Woven? _____
(i.e. mylar, polyester, Pentex, Dacron, Kevlar, etc.)

Material Composition of 2nd Sail _____ Laminate or Woven? _____
(i.e. mylar, polyester, Pentex, Dacron, Kevlar, etc.)

Material Composition of Leech Cover (i.e. sunbrella, dacron, tedlar) _____

Material Weight of Leech Cover (i.e. sunbrella, 4 oz,) _____

Owner Signature _____

Date _____

Rev 2/9/2025



The PHRF-LE Committee has revised the cruising credits in reference to the roller furling rules. The proposed credits for roller furling are as follows:

GENERAL QUALIFICATIONS

1. A measurement form must be submitted with the application and must be verified by a measurer or sail maker
2. The bottom of the roller furling drum must be above deck and it must be able to furl all qualified headsails in a normal manner.
3. Qualified roller furling sails must be in the luff groove for the full luff of the sail, attached to a swivel at the head of the sail and to the drum swivel at the tack.
4. No battens of any kind are allowed in qualified roller furling headsails.
5. For Class 2, sail changes from one qualified RF sail to a second qualified RF sail are allowed during the race provided that the changed sail is attached in the manner stated in point 3 and is the registered <110% sail.
6. Qualified RF sails must exhibit the appropriate PHRF-LE label in the area of the tack. The labels will be mailed from PHRF-LE upon completion of the CRUISING CREDIT Application and approval from PHRF-LE. A sail without a label is not a legal sail and thus could be protested by your competitors.
7. Roller furling credits for boats designed as cutters will be addressed by the committee on an individual basis.
8. Once you receive your credits, you must race with the qualified RF configuration. Notification and acknowledgement to the PHRF-LE committee is required for all changes. Switching back to a non-RF configuration is allowed only once during the season with no return to RF credits allowed for the rest of the season.
9. *Violation of the RF cruising credit rules is a serious offense. Upon sustained protest, violators will be disqualified from the race and/or series in which the violation occurs. Additionally, the PHRF-LE committee may revoke future cruising credits and review the protest for further disciplinary action by PHRF-LE.*

CREDITS

RF Credit- Class 3 +6 sec / mi

Limited to one headsail constructed of woven Dacron or other woven polyester fibers with a minimum 4oz fabric UV cover on the leech and foot of the sail.

RF Credit- Class 2 +3 sec / mi

Boat is limited to using two headsails*; the 2nd sail must be 110 % or less that have been qualified for the current year. No limitations on sail materials.

For example, if you have roller furling sails registered from a previous year and replaced it with a new sail, the old sail can no longer be used for racing. In addition, if you previously registered a 135% sail as your largest headsail and purchased a new 155% sail, you cannot use the 135% sail for racing as it is not < 110%. If your sail inventory has a 135%, an old 155%, and a new 155% that was registered for the roller furling credit, you cannot use the 135% or the old 155% if the air is up in order to 'save' the new one from breaking down.

*Not including storm jibs as defined in ISAF Offshore Special Regulations 4.26

PHRF-LE Standard Dimensions and Sail Measurements

F. RIG AND SAIL AREA TERMS AND DEFINITIONS:

- “I”** Rig foretriangle height measured along the foreside of the mast from the main deck datum to the top of the jib halyard sheave. The height of the deck used as datum for “I” measurement shall be taken as 4% of beam above the shear line abreast of the mast. For boats similar to the CAL28 and MORG27 whose cabin extends athwartships to the shear line, use the stripe along the hull which represents the shear line.
- “ISP”** AS-DESIGNED spinnaker hoist height measured vertically from the deck datum to the top of the spinnaker halyard sheave
- “J”** Rig foretriangle base measured from the foreside of the mast to point where forestay attaches to deck or bowsprit in a direction parallel to the water line.
- “JC”** AS-DESIGNED spinnaker foot rig length measured horizontally from EITHER the MSD to the tack point on the forward end of a fully extended bowsprit pole OR from the forward face of the mast to the tack point of a mast-mounted spinnaker pole in standard position. For stemhead-tacked spinnakers, JC = J.
- “P”** Measured luff length of mainsail from tack to head measuring points. This term shall be used for actual mainsail area computation in lieu of the rig “P” which is used for standard mainsail area computation.
- “E”** Measured foot length of mainsail from tack to clew measuring points. This term shall be used for actual mainsail area computation in lieu of the rig “E” which is used for standard mainsail area computation.
- “HB”** Measured headboard length from head measuring point to after top edge of headboard.
- “MGM”** Mainsail mid-girth dimension measured as the shortest distance between the leech half-point and the luff, bridging any hollows in the leech of the sail. Obtain by folding the head measuring point to the clew measuring point, applying equal and sufficient tension to the leech to produce the leech half-point, then measuring the shortest distance from the leech half-point to the forward edge of the luff bolt rope.
- “MGU”** Mainsail upper-girth dimension measured as the shortest distance between the leech three-quarter point and the luff, bridging any hollows in the leech of the sail. Obtain by folding the head measuring point to the leech half-point, applying equal and sufficient tension to the leech to produce the leech three-quarter point, then measuring the shortest distance from the leech three-quarter point to the forward edge of the luff bolt rope.
- “LLJ”** Measured luff length of headsail from tack to head measuring points.
- “LP”** Measured headsail dimension from clew measuring point to forward edge of luff in line of measurement perpendicular to luff (shortest distance between clew measuring point and luff).
- “SLU”** Measured Spinnaker Luff length from tack to head measuring points
- “SLE”** Measured Spinnaker Leach length from clew to head measuring points
- “SGM”** Measured spinnaker mid-girth (1/2 girth) length from the luff to leech mid-girth measuring points
- “SGF”** Measured spinnaker foot length from the tack to clew measuring points
- “SPL”** Spinnaker pole length as measured, when fitted on the mast and set in a horizontal position athwartships, from the forward center line face of the mast to the extreme outboard end of the pole.
- “H”** Height of spinnaker sheave above the main deck datum. Main deck datum as defined for “I” dimension. (Also referred to as “ISP”)
- “WPL”** Whisker pole length as measured from the forward center line face of the mast to center of clew grommet (or D ring) of the headsail to which the whisker pole is attached, taken in the direction of pole axis.

PHRF-LE Standard Dimensions and Sail Measurements

“SL”	Length of a sprit plus “JC” dimension. Symmetrical spinnakers cannot be tacked to sprits.
“ASL”	Allowable “SL”: The measurement obtained by dividing SGM by 1.50.
“SPRIT”	A hull-mounted pole or hull extension that tacks an asymmetrical spinnaker at some distance in front of the measured “J” dimension.
“SPINNAKER”	Any sail which, when carried in its normal position, is set forward of a boat’s foretriangle with a mid-girth equal to, or greater than, 75% of its foot girth, including such sails tacked to a stemhead fitting or such sails provided with a stemhead tackline.
“CODE “ZERO” SPINNAKER”	A spinnaker with a mid-girth less than 75% of its foot girth.

MEASURERS

Andrews, Tim
NCYC
timothy.andrews3000@gmail.com

Blackburn, Drew
PCYC
drewjblackburn@gmail.com

Brink, David
SSC
daveb@pncpa.biz

Burris, Sandy
LYC
sanfordburris@gmail.com

Daley, Rob
BHSC
rpdaley57@yahoo.com

Declercq, Al
Clinton Township, MI
adeclercq@quantumsails.com

Devenish, Andrew
MBC
gt6racer@msn.com

Earhart, John
PCYC
johne@fastmail.comm

Elliott, Dan
Ullman Sails
delliott@ullmansails.com

Ficcardi, A. J.
EYC
ficcardiaj@gmail.com

Filson, Scott
GRSC
rocketship.177@gmail.com

Freeman, Tom
PSSC
tfreeman@inps.on.ca

Gialanella, John
GIYC
johngialanella@gmail.com

Glass, Nori
BHSC
noriglass@gmail.com

Goldberg, Brian
Greiner Sails
brian@greinersailmakers.com

Harris, Gary
North Sails
gary.harris@northsails.com

Howe, Doug
WSSC
d1howe@wowway.com

Klock, Jennifer
BYC
jennifer.klock@gmail.com

Koski, Greg
Ullman Sails
gregorykoski@ullmansailsleveland.com

Kulwicki, Jim
BYC
james-edsers@verizon.net

Lengyel, David
AYC
djlengyel@yahoo.com

MacMillan, Dave
SLSC
digmac2@aol.com

Merkle, Chris
PIBYC
merklec@aol.com

Mueller, Craig
Western Lake Erie At Large
craigmueller6712@gmail.com

Obersheimer, Charles
BYC
obiesail@pcom.net

Raynor, George
CLYC
hardtack30168@yahoo.com

Ryan, David
CIC
drvan@buckeye-express.com

Schiavoni, Paul
Buffalo At Large
pschiavoni3@gmail.com

Squizzato, Mark
PDYC
marksquizzato@gmail.com